


QTMB

Multi-range cable grommets for QUICK systems

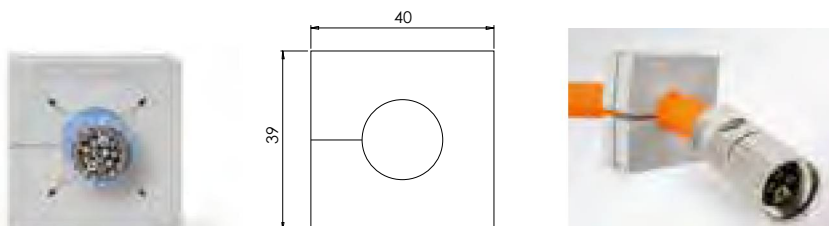

IP54

Product description

The new QTMB is used to route pre-terminated cables into the KEL-QUICK system.

The innovative membrane enables the routing of cables with diameters that can vary up to 3 mm.

For the first time, utilising the QTMB, even large cables with cable diameters from 14 to 29 mm can be routed.

Advantages & benefits

- High flexibility: Due to the innovative membrane, one grommet can be used for various cable diameters (can vary up to 3 mm)
- For the first time, it is also suitable for large cables with clamping ranges up to 29 mm
- Innovative wave cut for more tightness

Specifications

Material	Elastomer
Flame class	UL94-Vo, self-extinguishing
IP rating	IP54
Temperature	- 40°C to + 100°C (static)
Properties	Halogen-free, silicone-free

